

# PRODUCT INFORMATION

## KSF15 V

**TOP**LINE ●●●

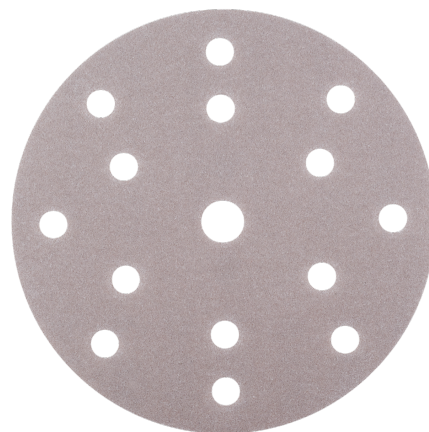
Backing type Highly tear-resistant plastic foil  
Grain type Aluminium oxide  
Bond Synthetic resin

SHAPE CK 86 




- Open coated, special stearate coating avoids clogging (from 180 grit)
- Ideal for use together with the RH15 V backing pad
- Highly tear-resistant plastic foil for long lifetime

Tear-resistant self fastening disc with 15-hole design for processing of paints, lacquer and fillers.

 For matching backing pads, see page 98



### KSF15 V

	Grain SU			Product category number	GTIN
150	80	50	304350	PK06	4011890099285
150	120	50	304351	PK06	4011890099292
150	150	50	304352	PK06	4011890099315
150	180	50	304353	PK06	4011890099322
150	240	50	304354	PK06	4011890099339
150	320	50	304355	PK06	4011890099346
150	360	50	304356	PK06	4011890099353
150	400	50	304357	PK06	4011890099360
150	600	50	304359	PK06	4011890099384
150	800	50	304360	PK06	4011890099391
150	1000	50	304361	PK06	4011890099407
150	1200	50	304362	PK06	4011890099414
150	1500	50	304363	PK06	4011890099421
150	2000	50	304364	PK06	4011890099438

