
_			
	REVISION HISTORY		
REV.	DESCRIPTION	DATE	
02	REVISED PER LL0132	2017-08-04	
Α	INITIAL RELEASE PER LL0132	2017-09-06	
В	REVISED PER LC1517	2018-12-03	

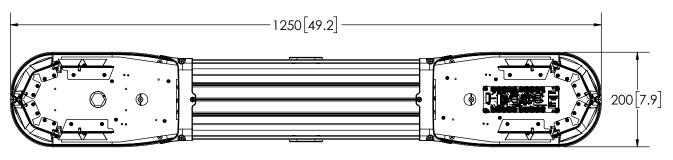

## **REAR OF VEHICLE**

WIRING KEY								
COLOUR	COMPONENT	TYP. MAX CURRENT (A)						
RED	LED - POWER	4.0	N/A					
BLK	GROUND	4.0	20A LIMIT					
BRN	PRIMARY PATTERN	0.01	ALT L/R QF CL1					
ORG	SECONDARY PATTERN	0.01	ALL ON QF CL1					
YEL	ALLEY LEFT	N/A	N/A					
GRN	ALLEY RIGHT	N/A	N/A					
BLU	WORKLIGHT	N/A	N/A					
VIO	PATTERN SELECT	0.01	N/A					

## **SPECIFICATIONS**

- 1. CERTIFICATIONS; R10 & R65 CLASS 1 APPROVED
- 2. FLASH MODE: NOMINAL 125 ± 5 FPM
- 3. VOLTAGE (NOMINAL): 12/24 VDC 4. CURRENT (MAXIMUM): 4.0 A (at 12VDC) 5. CONNECTION: 14 & 26 AWG WIRES
- 6. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 7. BASE MATERIAL: PC (BLACK) 8. LENS MATERIAL: PC (AMBER)



## NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 30mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 4.5m (15 ft)
- 6. CABLE EXIT DRIVER'S SIDE
- 7. DIMENSIONS IN MILLIMETRES [INCHES (FOR REFERENCE)]

  8. USE SUB ASSEMBLY (143-00013-13) FOR MANUFACTURE
  PROPRETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HERBIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATE (\*ECCO\*) AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HERBIN MAY NOT SEL USED, FOR ANY OTHER PURPOSE WITHOUT PROPER SECONDER HERBIN MAY NOT SEL USED, FOR ANY OTHER PURPOSE WITHOUT PROPE RECOONDERS OF THE PROPERTY OF THE PURPOSE WITHOUT PROPER SECONDERS OF THE PROPERTY OF THE PURPOSE WITHOUT PROPER SECONDERS OF THE PURPOSE WITHOUT PROPER SECONDERS OF THE PURPOSE WITHOUT PROPER SECONDERS OF THE PURPOSE WITHOUT PROPERTY OF THE PURPOSE WITHOUT PROPE

	SCALE 1:8			APF	ROVALS	DATE				_ ^		
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.			DRAWN BY	NP	2018-11-02	<b>ECCO</b> ® www.eccolink.			.com			
	MODEL REFERENCED: C+		CHECKED	JUP	2018-10-17	<b>1</b>						
	TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG.	JGW	2018-10-09	Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 6332244					
Ī	MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES • 0.5	ELEC. ENG.			A	SSY,S	UBLBR,13,49	"/1.2	25M,AMBER	
	XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04	FRACTIONS	TEST ENG.	DFG	2018-10-30	CUSTOMER PA				PRODUCT SERIES:	
	X.XXX ± 0.02		1 1/04				13-00	013-E			13	
TES	THIRD ANGLE PROJECTION					SIZE: A4	DWG.	NO. 13	3-000	13-E	REV.	
OF			Electronically Controlled Use Latest Copy		SHEET 1 OF	1 Project:	LL0132	Date Cre	eated: 2017-07-14	В		