
| 1 | DEVICION LIBOTORY | | | | | | |
|------|----------------------------|------------|--|--|--|--|--|
| | REVISION HISTORY | | | | | | |
| REV. | DESCRIPTION | DATE | | | | | |
| 02 | REVISED PER LL0196 | 2018-07-27 | | | | | |
| Α | INITIAL RELEASE PER LL0196 | 2018-09-13 | | | | | |
| В | REVISED PER LL0196 | 2018-11-14 | | | | | |

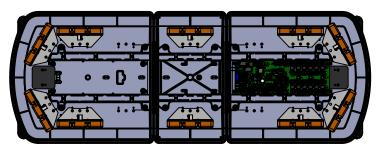

REAR OF VEHICLE

| WIRING KEY | | | | | | | |
|------------|----------------|----------------------|--|--|--|--|--|
| COLOUR | COMPONENT | TYP. MAX CURRENT (A) | | | | | |
| RED | MAIN POWER | 0.55A x 10 LED | | | | | |
| BLK | GROUND | 20A LIMIT | | | | | |
| | | | | | | | |
| BRN | PATTERN 1 | 0.02 | | | | | |
| ORG | PATTERN 2 | 0.02 | | | | | |
| YEL | ALLEY LEFT | 0.02 | | | | | |
| GRN | ALLEY RIGHT | 0.02 | | | | | |
| BLU | WORKLIGHT | 0.02 | | | | | |
| VIO | PATTERN SELECT | 0.02 | | | | | |

SPECIFICATIONS

- 1. FLASH MODE: NOMINAL 125 ± 5 FPM
- 2. VOLTAGE (NOMINAL): 12-24 VDC
- 3. CURRENT (NOMINAL): 5.5A @ 12 VDC
- 4. CONNECTION: 14, 18 AND 24 AWG WIRES
- 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 6. BASE MATERIAL: ALUMINUM/POLYCARBONATE
- 7. LENS MATERIAL: POLYCARBONATE
- 8. WITH HANDHELD CONTROLLER: NO
- 9. CERTIFICATIONS: R10 & R65 APPROVED

NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 44mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 4.5m [15ft] FROM INTERNAL CONNECTOR
- 6. CABLE EXIT DRIVER'S SIDE
- 7. LED LENSES ARE COLORED FOR CLARITY ONLY
- 8. DIMENSIONS IN MILLIMETRES [INCHES(FOR REFERENCE)]

| PROPRIETARY | AND CONFIDE | NTIAL INFORMAT | ION |
|-------------|-------------|----------------|-----|

HIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECAPONIC CONTROLS COMPANY AND/OR ITS ECCO SAFTY CROUP AFFILIATE

("FECCO") AND IS ISSUED IN CONTRIBUTE OF ECCOMPANY AND THE PROPERTY OF THE PROPERTY O



| | | | | APP | ROVALS | DATE | | | | | | |
|-----------------|---|--|------------------|--|--------|-----------------------|-------------------|--------------------|------------|----------|-----------------------|------|
| | | | | DRAWN BY A | MDG | 2018-11-13 | | EC | :CC |) w | ww.eccolink | .com |
| | DO NOT MANUALLY UPDATE. MODEL REFERENCED: B | | | CHECKED | LSH | 2018-11-13 | (XX) | | | | | |
| | TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE: | | | MECH. ENG. | JGW | 2018-11-13 | | | | | Asia Pacific +61 (0)3 | |
| | MILLIMETERS DECIMALS | INCHES DECIMALS | ANGLES ± 0.5* | ELEC. ENG. | MMG | 2018-11-13 | LBR,12 | +,ICE,30 | D"/.76M,14 | 13-301 | 79-12,AMB, | R65 |
| | XX. ± 1.0mm XX.X ± 0.5mm | X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 | FRACTIONS | TEST ENG. | DFG | 2018-11-14 | CUSTOMER PAR | | | | PRODUCT SERIES: | |
| \Box | THIS | RD ANGLE PROJECTI | ± 1/64 | SALES. | | | 12-301 | / / - E | | | 12+ | |
| ATES ED O | | | | | | | SIZE: A4 | DWG. NO | · 12 | 2-301 | 79-E | REV. |
| OF | | | J | Electronically Controlled Use Latest Cop | | olled Use Latest Copy | SHEET 1 OF 1 | Project: LLO | 196 | Date Cre | ated: 2018-06-14 | В |
| | | | | | | | | | | | | |