

# PRODUCT DATA SHEET


KFK

**TOP**LINE ●●●

Backing type Vulcanised fibre  
Grain type Ceramic grain  
Bond Synthetic resin

- Especially suitable for hardened and tempered steels, tinder areas and titanium
- Perceivably faster stock removal
- Long lifetime

Ceramic grain fibre disc – the grain enables superior stock removal performance in a short period of time with a very long lifetime.

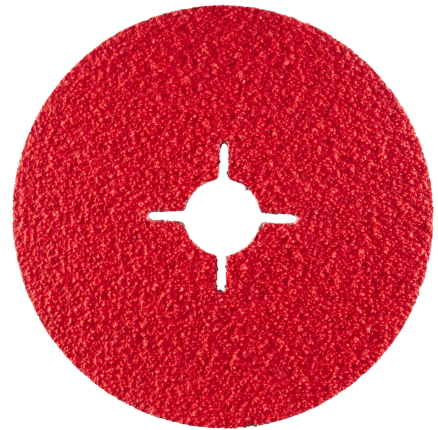

**i** For use only on matching RH TURBO and RH ST backing pads – see page 71

Type designation	KFK
Article designation 1	Fibre disc
Article no.	304291
GTIN	4011890083352
Content	25
Content unit	Piece
Weight	0,028 kg
Product dimensions	115 x 22,23
Diameter 1	115 mm
Hole	22,23 mm
Grain SU	36
Felt hardness (D)/ flap thickness (H)	/
Backing type	Vulcanised fibre
Grain type	Ceramic grain
Bond	Synthetic resin
Working speed	80 m/s
Maximum revolutions	13300 U/min
Material suitability	Stainless steel Steel
Industry suitability of the article	Anlagenbau Bauschlosserei Kessel- und Behälterbau Vehicle construction Konstruktionsstahlbau Foundry and dressing shop Rohrleitungsbau Containerbau Shipyards
Product category number	PK06
Product category text	SU
GTIN barcode packing unit	4011890115121
Type of packaging	Carton
Package length	120 mm
Package width	120 mm
Package height	50 mm
Weight of packing unit	0,700 kg

Customs tariff number

68053000

Country of origin

DE

**RHODIUS Schleifwerkzeuge GmbH & Co. KG**

Brohltalstraße 2 · D-56659 Burgbrohl · [service@rhodius.de](mailto:service@rhodius.de) · [www.rhodius-abrasives.com](http://www.rhodius-abrasives.com)  
Tel. +49 2636 920-400 · kostenfreie Fax-Nr. (DE) +49 800 6645394

**RHODIUS**